

EXflow 710 Flow vessel - stainless steel / ETFE lined





- › Flexible design
- › DN25 / 1" or DN50 / 2"
- › Flow direction 90° or 180°
- › Best sensor position
- › Stainless steel AISI 316Ti / 1.4571 or ETFE-lined
- › High variation of process connections
- › Up to 16 bar and 140 °C

The flow-through vessel EXflow 710 is an exactly matching accessory for retractable fittings. It is especially designed for the retractable housings EXtract 810 and 810M. The sensor is positioned optimally in the process and provides reliable readings.

Specifications

Material	1.4571 / 316Ti optional ETFE-lined
Process pressure	16 bar
Process temperature	140°C
Process connection	Flange DN25, ANSI 1", DN50, ANSI 2", welding connection
Sensor connection	Flange DN25, DN50, Thread G1 1/4" DN25, G3/4", FNPT3/4"
Flow direction	90° oder 180°

Dimensions

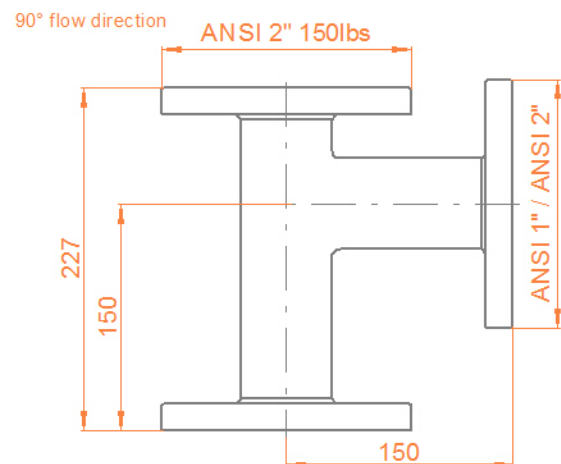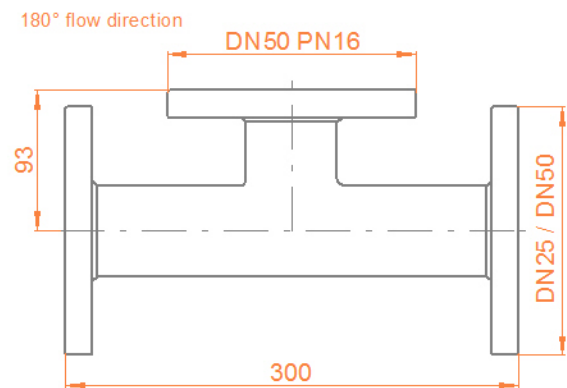

EXflow 710 Flow vessel - stainless steel / ETFE lined



Installation on EXtract 820 with flow vessel
EXflow720

Ordercode

Code	Material	Delivery
71	Stainless steel 1.4571 / 316Ti	2 weeks
ET	Stainless steel 1.4571 / 316Ti ETFE lined	0 weeks

Code	Process Connection	Delivery
D25	Flange DIN 25	2 weeks
D50	Flange DN50 PN16	2 weeks
A10	Flange ANSI 1"	2 weeks
A20	Flange ANSI 2" 150lbs	2 weeks
W25	Welding pipe DN 25/1" (not option "ET")	2 weeks
W50	Welding pipe DN 50/2" (not option "ET")	2 weeks

Code	Holder- /Sensor- Connection	Delivery
D50	Flange DN50	2 weeks
A20	Flange ANSI 2"	2 weeks
I25	G1 1/4" socket (not option "ET")	2 weeks
N34	Female thread NPT 3/4" (not option "ET")	2 weeks
G34	Female thread G3/4" (not option "ET")	2 weeks

Code	Flow direction	Delivery
18	180°	2 weeks
09	90°	2 weeks